

AR 80 – AR 105 – AR 135

High-efficient hardmount industrial washer-extractors

FEATURES

- Rigid mounted, normal spin, 200 G
- Stainless steel top panel, anthracite grey front and side panels
- Stainless steel drum and tub
- Basic control – easy to use microprocessor
- Patented soap hopper
- Large drain valve (Ø76mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading and unloading

OPTIONS


- Coin-operated timer (CPS)
- Stainless steel front and side panels
- USB plug (on the back panel)
- Liquid Soap Print – liquid soap connection
- Liquid soap pumps
- Water recovery kit
- Steam heating version
- Drain pump (AR80)
- 3rd water inlet




HIGH-EFFICIENT HARDMOUNT INDUSTRIAL WASHER-EXTRACTORS

Technical drawing of a washing machine door. The drawing shows the front view of the door with a circular window. Dimensions are indicated by arrows and letters: A is the height of the door, B is the height of the window, C is the width of the door, D is the height of the window frame, and E is the height of the door frame.

FRONT SIDE

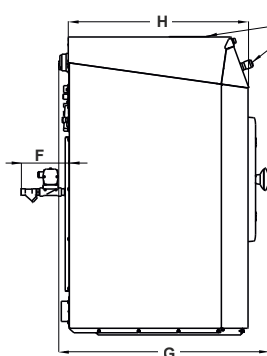

LEFT SIDE

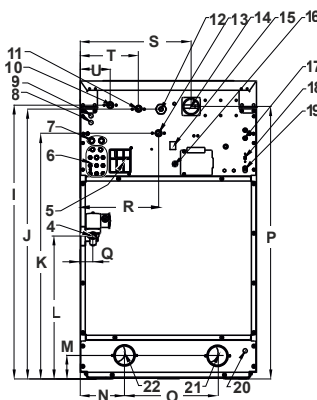

REAR SIDE

- 1 Control panel
- 2 Soap dispenser
- 3 Central stop button
- 4 Steam connection
- 5 Air relieve
- 6 Liquid soap connection
- 7 Recycled water inlet
- 8 Steam valve connection
- 9 Recycled water valve cable inlet
- 10 Cold water inlet, soft
- 11 Cold water inlet, hard
- 12 Electrical connection
- 13 Hot water inlet
- 14 Main switch
- 15 Heating change-over switch
- 16 Liquid soap pump electrical connection
- 17 Fuses
- 18 USB port
- 19 PC programming connection
- 20 Discharge water cable inlet
- 21 N/A
- 22 Drain valve 76 mm

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	P	Q	R	S
AR80	660	785	1115	676	349	166	88	920	1010	113	218	293	415	1020	1025	535	48	180
AR105	750	785	1225	676	342	225	98	1030	1120	113	218	338	505	1130	1135	480	42	192
AR135	750	900	1225	788	342	225	98	1030	1120	113	218	338	505	1130	1135	480	42	192
	width	depth	height															