

AF65 - 280

High efficient soft mounted washer extractors

FEATURES

- Freestanding, high spin (up to 1165 rpm - AF65, AF80)
- 400G extraction speed
- Stainless steel top and front and side are grey skinplate
- Stainless steel drum and tub
- Patented soap hopper
- Large drain valve (Ø 76 mm)
- High capacity water inlets (AF280)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading
- Special textured drum

OPTIONS

- Coin operated
- Stainless steel front and side panels
- USB plug (on the back panel)
- Liquid Soap Connection
- Liquid soap pumps
- Water recovery kit
- Steam heating version
- Drain pump (AF65, 80)
- 3rd water inlet

CONTROLS

- Basic Control - easy-to-use microprocessor
- Graphitronic Touch
 - 7" full color touch screen display
 - User-friendly screen with operating instructions built in as part of the control
 - Complete control content available in 34 languages
 - 15 wash cycles for OPL, 12 for Vend
 - 8 easy-to-understand cycle modifiers
 - Machine programming & firmware updates through cloud



AF with basic control



AF with touch screen control

DIMENSIONS & SPECIFICATIONS


HIGH EFFICIENT SOFT MOUNTED WASHER EXTRACTORS

TYPE		AF65	AF80	AF105	AF135	AF180	AF240	AF280
INNERDRUM								
maximum capacity 1:9	kg	7	9	12	15	20	27	31
capacity 1:10	kg	6,5	7,5	10,5	13,5	18	24	28
volume	liters	65	75	105	135	180	240	280
diameter	mm	530	530	620	620	750	750	750
DRUM SPEED								
wash	rpm	49	49	49	49	42	42	42
extraction	rpm	1165	1165	1075	1075	980	980	915
G-FACTOR		400	400	400	400	400	400	350
HEATING								
electricity (standard)	kW	6	6	9	12	12	18	22
steam	bar	1 - 8	1 - 8	1 - 8	1 - 8	1 - 8	1 - 8	1 - 8
hot water	°C	90	90	90	90	90	90	90
Sound pressure level	dB (A)	<65	<65	<65	<65	<65	<65	<65
Water valves connection	BSP	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Water pressure	kPa	100-800	100-800	100-800	100-800	100-800	100-800	100-800
Rec. water pressure	kPa	300-500	300-500	300-500	300-500	300-500	300-500	300-500
Water inlet	l/min	20	20	20	20	20	20	20-50
Drain valve	outer Ø mm	76	76	76	76	76	76	76
Flow amount with drain valve	l/min	210	210	210	210	210	210	210
Steam valve connection	BSP	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
Steam pressure	kPa	100-800	100-800	100-800	100-800	100-800	100-800	100-800
TRANSPORT DATA								
Gross	kg	180	200	235	275	395	450	515
Net	kg	170	185	210	255	380	430	495
Packed HxWxD	mm	1245×750×840	1365x835x840	1365x835x840	1365×835×985	1570x1025x1015	1570x1025x1150	1570x1025x1225

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W
AF65	710	24	349	1135	582	240	730	642	48	180	940	480	88	230	203	N/A	67	1030	42	283	390	218	113
AF80	710	24	349	1135	582	240	780	692	48	180	940	480	88	230	203	N/A	67	1030	42	283	390	218	113
AF105	795	24	342	1245	617	240	785	692	48	180	1050	506	88	230	203	N/A	67	1140	42	293	475	218	113
AF135	795	24	342	1245	617	240	935	842	48	180	1050	506	88	230	203	N/A	67	1140	42	293	475	218	230
AF180	970	24	477	1430	777	335	960	872	48	90	1234	490	108,5	270	203	N/A	67	1324	80	293	610	218	113
AF240	970	24	477	1430	777	335	1095	1007	48	90	1234	490	108,5	270	203	N/A	67	1324	80	293	610	218	113
AF280	970	24	477	1430	777	335	1175	1087	48	90	1234	490	108,5	270	203	N/A	67	1324	80	293	610	218	113
	width			height			depth																

	AF80
Water consumption	6,6 L/KG
Electricity consumption	0,18 kW/kg

*Program nr 13

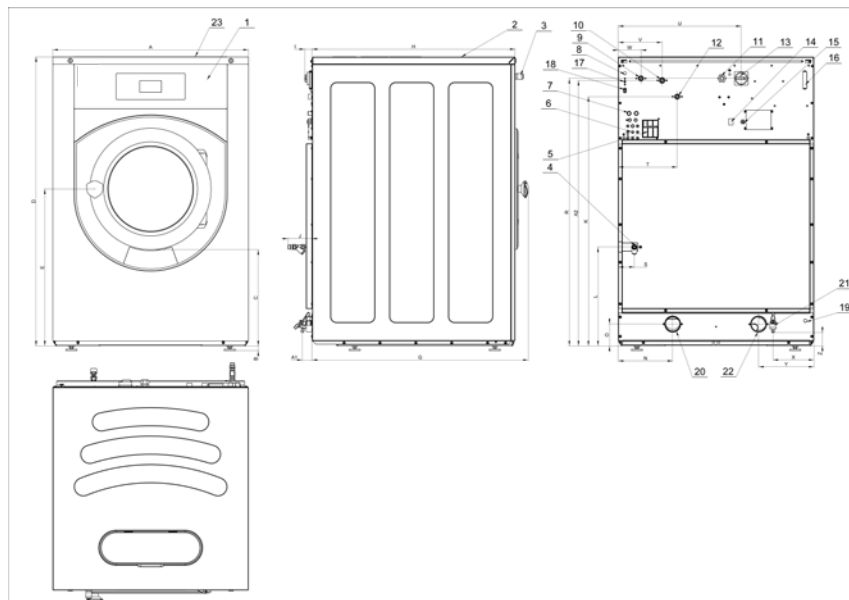

- Control panel
- Soap dispenser
- Centralstop button
- Steam connection
- Air relieve
- Liquid soap connection
- Recycled water inlet
- Recycled water valve cable inlet
- Cold water inlet, soft
- Cold water inlet, hard
- Electrical connection
- Hot water inlet
- Main switch/Field wiring terminal (NA models)
- Heating change-over switch
- Liquid soap pump electrical connection
- Fuses
- USB port - optional
- PC programming connection
- Discharge water cable inlet
- Drain valve - 3 in. [76 mm]
- Drain Valve - 1/2", applicable for wash bath sample (on request only)
- Drain valve or recycle valve - 3 in. [76 mm] 280 L Models only)
- Hidden USB port (under top cover) - standard